
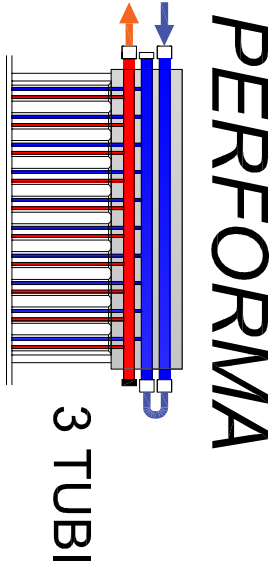
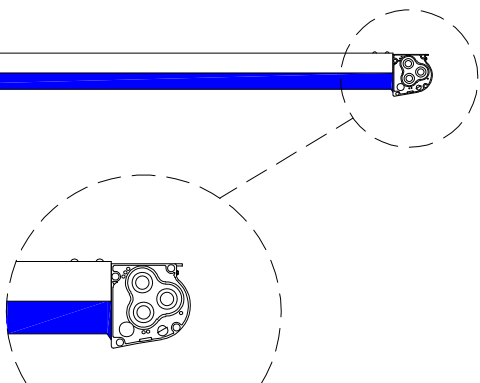


2316

Pleion X-RAY 21 R

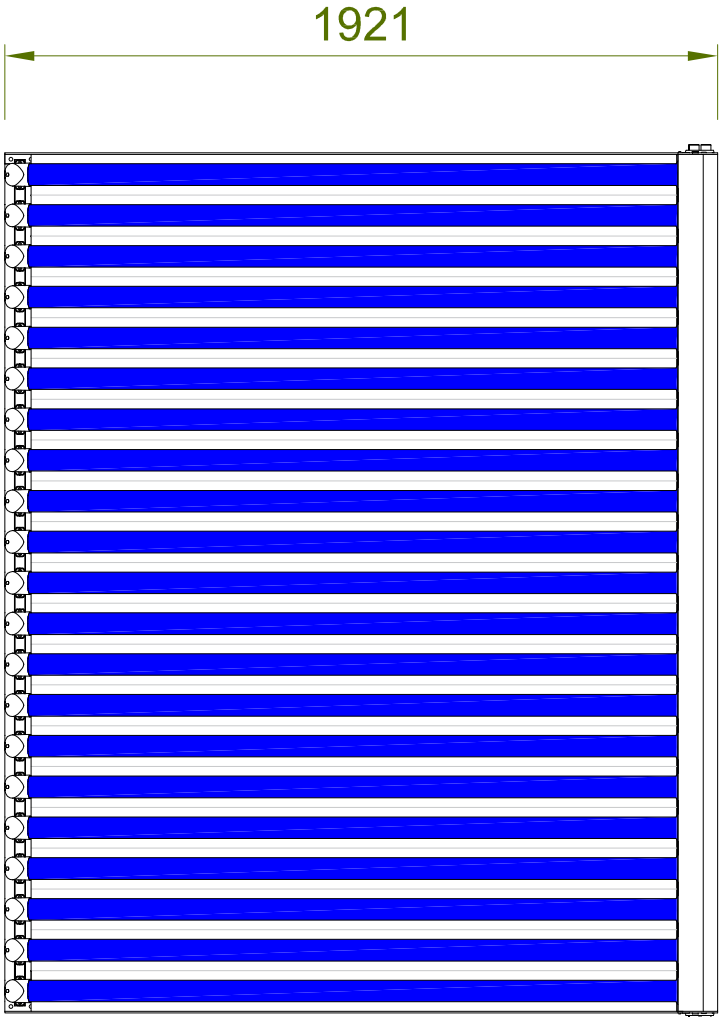

DATA SHEETX-RAY 21 R


High efficiency vacuum solar collectors Pleion X-RAY R consisting of 58 mm diameter horizontal double air casing vacuum tubes. Anodized aluminum framework for strength. Direct and diffused solar radiation penetrates the outside of the tubes and is captured in the absorber. The X-Ray 21 collector comes with a parabolic reflector which enhances the annual Energy performance. A special aluminum absorber inside the glass tube transfers the heat to the copper U tube inside the tubes. Strength, reduced overall dimensions, energy performance and exclusive design make it a quality benchmark for the solar thermal market.	
The BASIC version (standard) has 2 internal tubes that allow laying with opposite inlet and outlet. Available in the PERFORMA version (optional) with third tube integrated in the header of the collector which allows entry and exit on the same side, with in-line installation and parallel connection. This brings the exclusive and extraordinary advantage of not having to make the external return line and drastically reduces installation costs and time, ensures balanced plumbing systems and a clean stylish appearance.	
Pleion X-RAY R may be fixed to any kind of surface.	



114



60

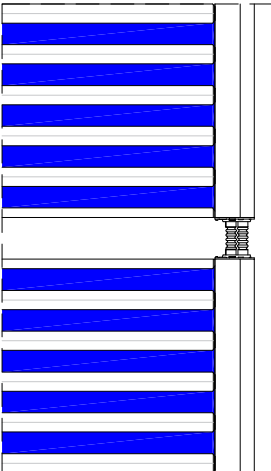

PLEION

Passion and Innovation make the difference

This scheme is purely indicative and does not constitute a commitment or responsibility on the part of PLEION S.r.l. and its employees. The exclusive planning and the subsequent implementation must be carried out in strict compliance with the laws in force. PLEION S.r.l. reserves the property of this design with the prohibition to reproduce it or transfer it to third parties without written authorization.

OGGETTO : 21.12.23

Vacuum SOLAR collector X-RAY 21 R

DIMENSIONS (length x width x height)	[mm]	1921x2316x114
GROSS SURFACE AREA	[m²]	4,45
OPENING SURFACE	[m²]	4,02
ACTIVE ABSORPTION SURFACE 380 °	[m²]	5,39
EMPTY WEIGHT	[kg]	73
LIQUID CONTENT	[l]	3,75
MAXIMUM WORKING PRESSURE	[bar]	10
RECOMMENDED FLOW	[l/min] ₁₅	3,15
PEAK POWER	[W]	2710
PERFORMANCE η_0	[%]	60,9
COEFFICIENT TRANSMISSION a1	[W/m²K]	0,690
COEFFICIENT TRANSMISSION a2	[W/m²K²]	0,005
COEFFICIENT ABSORPTION	[%]	92
COEFFICIENT ISSUE	[%]	6,5
COEFFICIENT GLASS TRANSMISSION	[%]	92
CONNECTIONS	4 / 6 per 3/4"-M	
MAXIMUM SEASONING TEMPERATURE	[°C]	300
MINIMUM INCLINATION AND MAXIMUM COLLECTOR	[°]	15 - 75
HEAD INSULATION THICKNESS	[mm]	30
WURBURG VALUE 50 °	[kWh/m²]	2885
IAM VALUE 50 °	[°]	1,05